



Huawei E1762 – APN Change Guide

To change your APN (Access Point Name) follow these instructions:

1. Go to **Tools > Options**

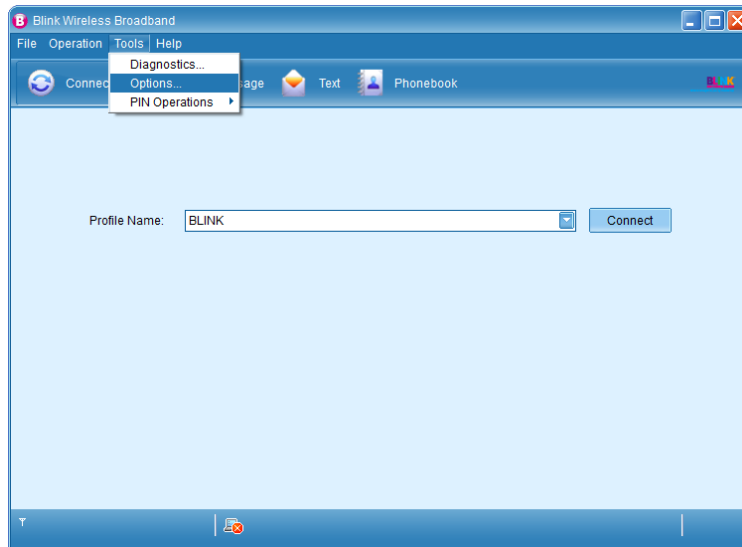


2. Click **Profile Management**

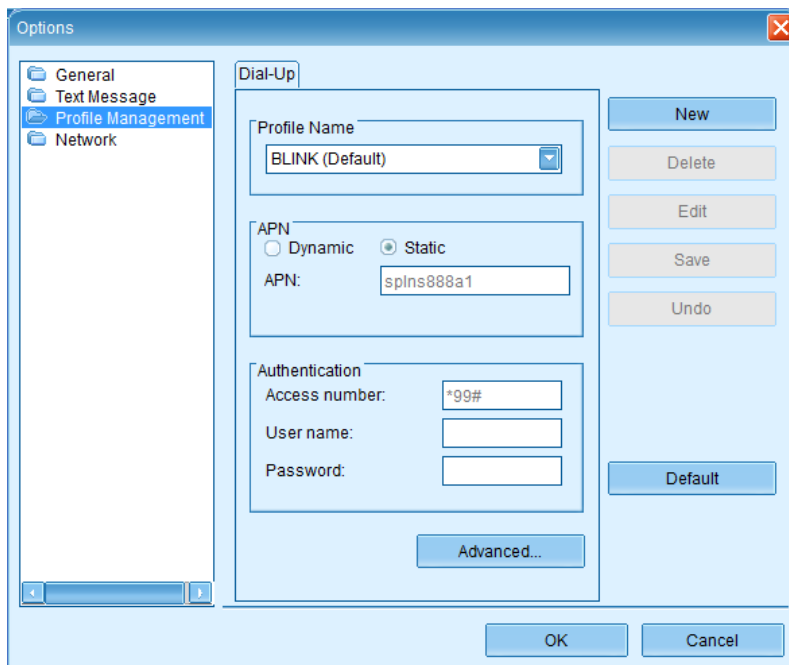

Huawei E1762 – APN Change Guide


3. Click **New**

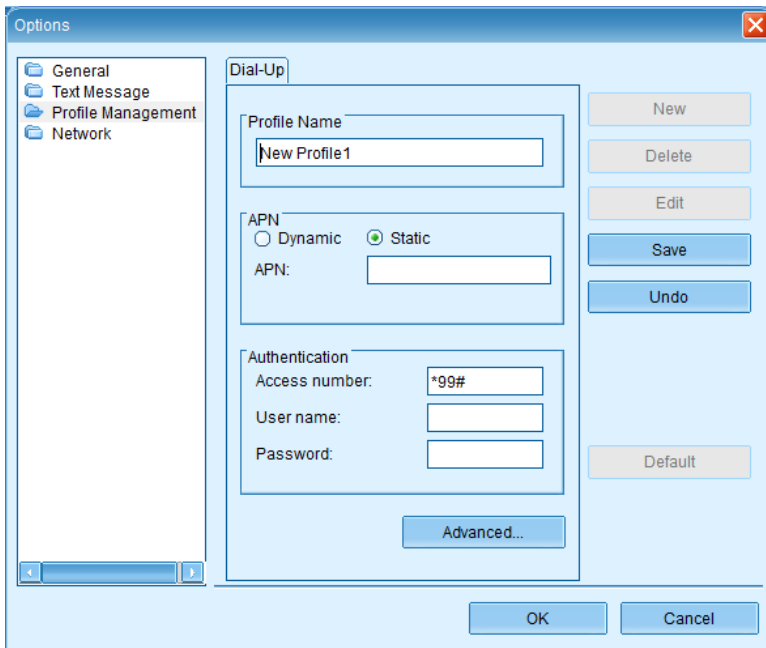

The screenshot shows the 'Options' dialog box with the 'Dial-Up' tab selected. On the left, a tree view shows 'General', 'Text Message', 'Profile Management', and 'Network'. The main area contains the following fields and controls:

- Profile Name:** A text box containing 'New Profile1'.
- APN:** Radio buttons for 'Dynamic' and 'Static' (selected). Below is an empty text box for the APN value.
- Authentication:** Text boxes for 'Access number:' (containing '*99#'), 'User name:', and 'Password:'.
- Buttons:** 'New', 'Delete', 'Edit', 'Save', 'Undo', 'Default', 'Advanced...', 'OK', and 'Cancel'.

4. Profile Name: **Blink New**
- APN: Select **Static**
- APN text box: **spIns888a1**

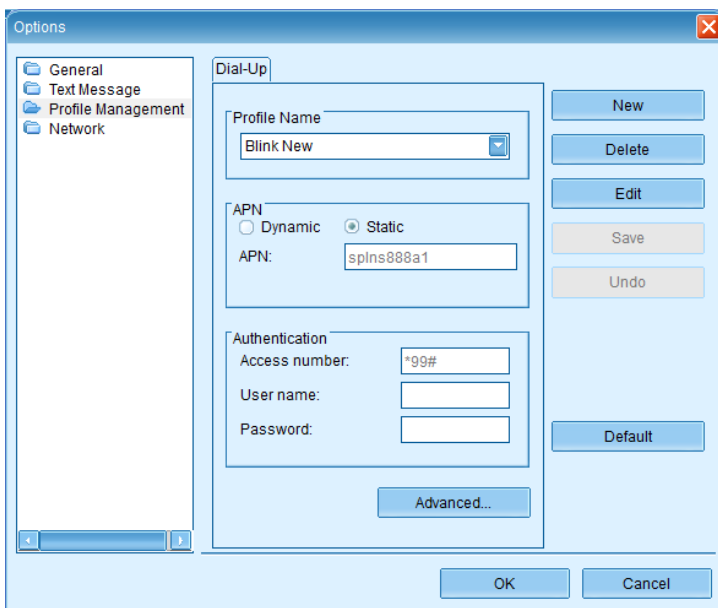

The screenshot shows the 'Options' dialog box with the 'Dial-Up' tab selected. The 'Profile Name' field is now a dropdown menu showing 'Blink New'. The 'APN' section has 'Static' selected and the text box contains 'spIns888a1'. The 'Authentication' section has 'Access number' set to '*99#'. The buttons are the same as in the previous screenshot.

5. Click **Save > Default > OK**